



m.	2.00	4.00	6.80
Kg	1200	510	215



m.	2.50	5.00	7.70
Kg	1400	600	375



m.	1.74	5.00	7.95
Kg	2500	800	500



m.	3.52	6.12	8.15
Kg	1600	880	600



m.	2.50	5.55	8.85
Kg	4500	2000	1000



m.	4.00	7.50	11.50
Kg	3920	1960	1200

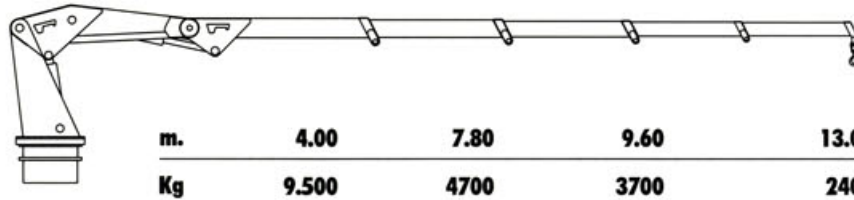


m.	4.60	9.00	12.00
Kg	3800	1870	1250

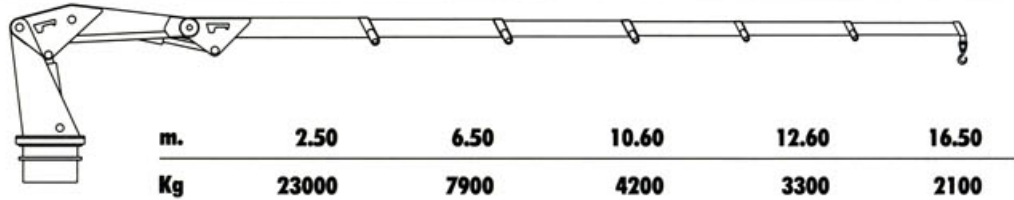


m.	2.30	7.05	10.35
Kg	15000	4800	2500

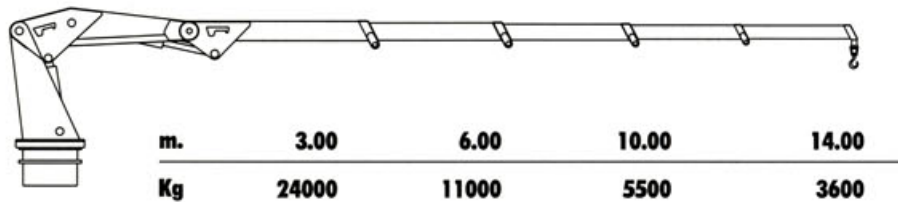
A BRACCIO SNODATO • KNUCKLE BOOM RANGE **VMCR**

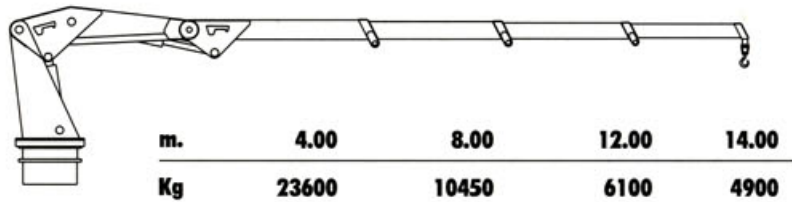
m.	4.00	7.80	9.60	13.00
Kg	9.500	4700	3700	2400

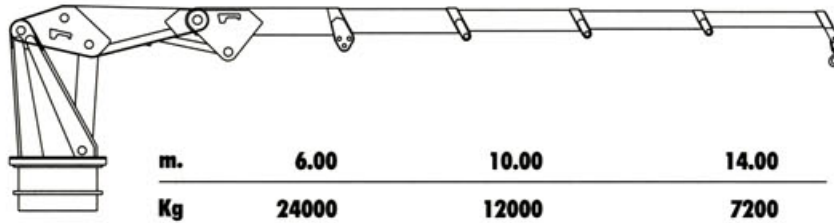
m.	2.50	6.50	10.60	12.60	16.50
Kg	23000	7900	4200	3300	2100

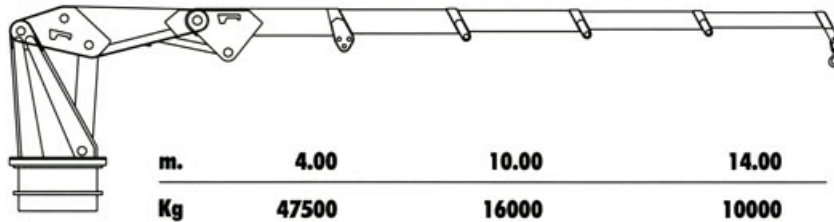
m.	3.00	6.00	10.00	14.00
Kg	24000	11000	5500	3600

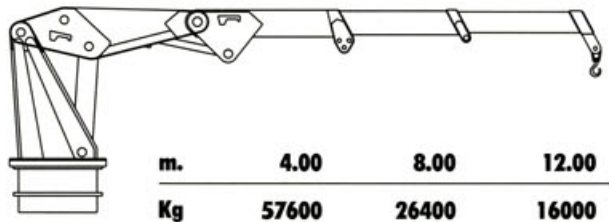
m.	4.00	8.00	12.00	14.00
Kg	23600	10450	6100	4900

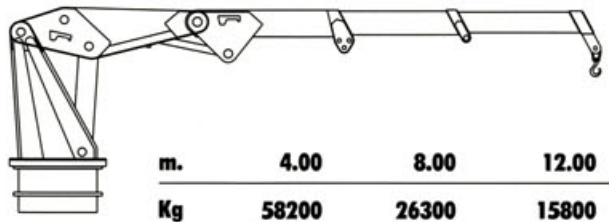
m.	6.00	10.00	14.00
Kg	24000	12000	7200

m.	4.00	10.00	14.00
Kg	47500	16000	10000

m.	4.00	8.00	12.00
Kg	57600	26400	16000

m.	4.00	8.00	12.00
Kg	58200	26300	15800

N.B. I dati riportati in questa scheda sono da ritenersi indicativi. Il costruttore si riserva in qualunque momento di apportare modifiche.
We reserve the right to change design and specification without prior notice.

